



Available online at
<http://ojs.unik-kediri.ac.id/index.php/ukarst/index>

 <http://dx.doi.org/10.30737/ukarst.v5i1>

U KaRst

Investigation of Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

C. Girsang^{1*}, P. P. Rahardjo², A. Lim³

^{1*,2,3} Civil Engineering Faculty, Parahyangan Catholic University.

Email: clintongirsang10@gmail.com.

ARTICLE INFO

Article History :

Article entry : 13-08-2020
Article revised : 01-10-2020
Article received : 19-10-2020

Keywords :

Abutment, Lateral Movement,
Method A, Method B, Plaxis 3D.

IEEE Style in citing this article :

[1] Ihsan Al-Abboodi, Tahsin Toma-Sabbagh, and Ali Al-Jazaairry, "Modelling the Response of Single Passive Piles Subjected to Lateral Soil Movement using PLAXIS," *Int. J. Eng. Res.*, vol. V4, no. 03, 2015, doi: 10.17577/ijertv4is030269

ABSTRACT

Soil as a subgrade foundation under embankment construction often creates problems in terms of stability and settlement. Therefore, it needs improvement by using preloading embankment. This article presents the investigation of pile behavior towards two scenarios of abutment construction using Plaxis 3D, a three-dimensional finite element program. The use of two scenarios of analysis was Method A. The abutment construction phase conduct without using a preloading embankment, and Method B, where a preloading embankment constructs before the abutment construction. The case study location at the Lembak bridge. Compare the analysis results with the measured data. Results showed that Method A and Method B's pile deflection yielded four times and one point six times larger than the measure data, respectively. Hence, it indicates that Method B recommends for future construction of bridge abutment.

1. Introduction


There are a lot of geotechnical problems caused by lateral soil movement. Soil movement itself cause by various factors such as consolidation, expansive soil, excavation, slope stability issue, embankment, and pile installation with too narrow spacing [1]. Bearing capacity, the foundation must be designed properly to ensure the building avoids problems differential settlement [2][3]. The differential settlement will affect the internal forces on structures [4]. The soil movements may, in turn, induce additional stresses and displacement in neighboring abutments piles [5].

The lateral soil movement can cause construction failure, especially on a pile foundation. Pile foundation that receives the lateral load from lateral soil movement is called

“passive pile”. Passive piles have become one of the most common slope stabilization methods in recent years. Estimating lateral loads caused by unstable soil movement, resultant stresses, and bending moments developed in the pile shaft have vital importance for an economical and safe design [6]. To determine the pile foundation structure's response, it can do it with the experimental test (loading test) or simulate a mathematical model [7].


Most slope failures occur either during or at the end of construction. Pore water pressure depends on the placement water content of the fill and the rate of construction [8]. Slope failures can also occur without reinforcement on steep slopes [9]. As the driving load(s) has reached the ultimate slope resistance, the slope begins to move/fail [10]. The Rigid piles can protect the human construction downslope of the piles [11].

Therefore, this paper will address the correlation between pile behavior and construction stages using a 3-dimensional approach with PLAXIS 3D. Analyzed two methods were: Method A, where the abutment constructs without any preloading embankment, and Method B, where a preloading embankment constructs before abutment construction. Embankment loads cause vertical and horizontal displacement [12]. **Figure 1.** illustrates construction stages for Method A, which started from (a) soil – cement mixing, (b) construction of the pile foundation and abutment, and (c) construction of barrier behind the abutment. **Figure 2** illustrates construction stages for Method B, which began from (a) soil – cement mixing, (b) construction of preloading embankment, (c) excavation of the area that will use for the abutment, (d) construction of the pile foundation and abutment, and (e) additional embankment work behind the abutment to reach planned elevation level.

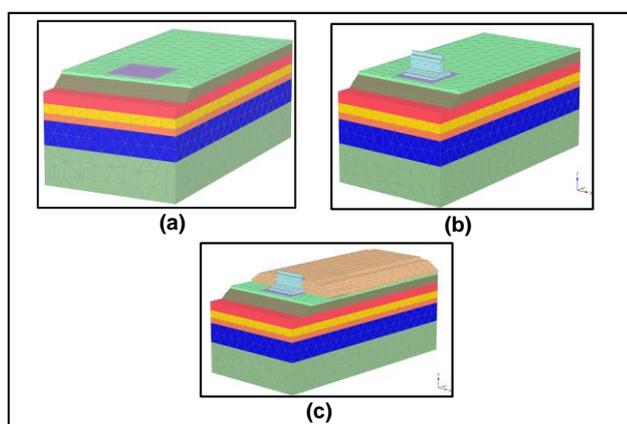

Source : Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

Figure 1. Illustration for Methode A Construction Stage Model

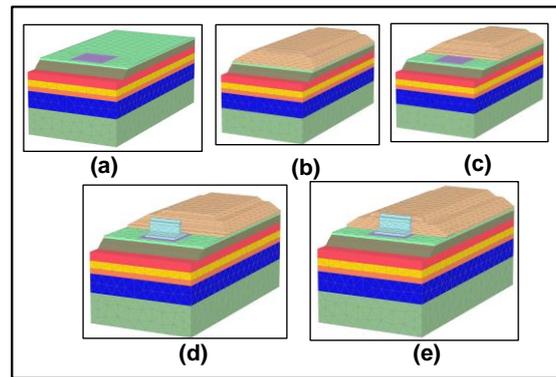

Source : *Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

Figure 2. Illustration for Methode B Construction Stage Model

The case study for the analysis is Lembak Bridge, located in East Borneo. The bridge across spanned 50 m and used 80 nos. driven piles with 60 cm diameter and embedment length of 27 m on the east side. **Figure 3** shows the location of the Lembak River, where the bridge location.



Source : *Google Earth, 2020*

Figure 3. Case Study Location

2. Literature Review

The addition of each layer of barrier up to achieving the desired embankment height will increase the settlement that occurs on the subgrade [12]. The settlement does not make the soil return to the original position after the soil reached its strength. Still, it will continue to increase with the maximum height embankment.

The largest settlement soil is in the area below the embankment center. Getting further away from the embankment center, it is getting smaller until the subgrade foundation. The embankment center is an area of great stress due to the applied embankment load and the dam's toe. The load that occurs is getting smaller, so the settlement is getting smaller [12].

3. Research Method

The Finite Element Method use for the case study. The finite element method is a numerical method to provide the differential problem and developed to help solve the solid mechanics model [13][14]. The finite element method divides a complex model into smaller and simpler element meshes. A solution can be obtained easier [15]. In the conventional subgrade reaction approach, the soil is model by spring elements attached to the pile at different depths [16]. The finer the mesh, the better the result will be.

The finite element method nowadays is much easier to be performed since the advancement of computer technology and its software development. One such program was PLAXIS [17][18]. For this research is used PLAXIS 3D [19][20].

PLAXIS 3D is a 3-dimensional finite element analysis program used for various analyses, wherein this study for foundation analysis. The program uses simple visual input, allowing users to automatically create complex case models with state-of-the-art output and calculation. Embedded Pile in PLAXIS is a 3-node element with 6 DOF per node (3 translations and 3 rotations) [21]. The embedded pile model is available in the latest version of PLAXIS 3D [22].

4. Analysis and Result

4.1 General

The case study is modeled and analyzed using PLAXIS 3D version 2013 with the Mohr-Coulomb parameter. The main parameters are cohesion (c) and friction angle (Φ). **Table 1** and **Table 2** show construction stages to be analyzed for Method A and Method B, respectively. This section contains (concise form) data analysis and interpretation of results. Interpretation of results using theories from articles as used. The descriptions are given theoretical, implicative, and managerial or practical.

Table 1. Construction Stages for Method A

No.	Stages Identification	Duration (days)	Calculation
1	Land clearing and soil cement mixing	0	<i>Plastic</i>
2	Driven Pile Construction	30	<i>Consolidation</i>
3	Bridge Abutment Construction	120	<i>Consolidation</i>
4	Embankment 1 (El. +11.00)	5	<i>Consolidation</i>
5	Embankment 2 (El. +12.00)	5	<i>Consolidation</i>
6	Embankment 3 (El. +13.00)	5	<i>Consolidation</i>
7	Embankment 4 (El. +14.00)	5	<i>Consolidation</i>
8	Embankment 5 (El. +15.00)	5	<i>Consolidation</i>
9	Embankment 6 (El. +16.00)	5	<i>Consolidation</i>
10	Embankment 7 (El. +17.00)	5	<i>Consolidation</i>
11	Embankment 8 (El. +18.00)	5	<i>Consolidation</i>

End

Source : *Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

Table 2. Construction Stages for Method B

No.	Metode A	Duration (days)	Permodelan
1	Land clearing and soil cement mixing	0	<i>Plastic</i>
2	Preloading Embankment 1 (El. +11.00)	5	<i>Consolidation</i>
3	Preloading Embankment 2 (El. +12.00)	10	<i>Consolidation</i>
4	Preloading Embankment 3 (El. +13.00)	8	<i>Consolidation</i>
5	Preloading Embankment 4 (El. +14.00)	9	<i>Consolidation</i>
6	Preloading Embankment 5 (El. +15.00)	6	<i>Consolidation</i>
7	Preloading Embankment 6 (El. +16.00)	6	<i>Consolidation</i>
8	Preloading Embankment 7 (El. +17.00)	6	<i>Consolidation</i>
9	Wait Time	79	<i>Consolidation</i>
10	Preloading Embankment Excavation	7	<i>Consolidation</i>
11	Driven Pile Construction	30	<i>Consolidation</i>
12	Bridge Abutment Construction	120	<i>Consolidation</i>
13	Embankment 1 (El. +11.00)	5	<i>Consolidation</i>
14	Embankment 2 (El. +12.00)	5	<i>Consolidation</i>


No.	Metode A	Duration (days)	Permodelan
15	Embankment 3 (El. +13.00)	5	Consolidation
16	Embankment 4 (El. +14.00)	5	Consolidation
17	Embankment 5 (El. +15.00)	5	Consolidation
18	Embankment 6 (El. +16.00)	5	Consolidation
19	Embankment 7 (El. +17.00)	5	Consolidation
28	Embankment 8 (El. +18.00)	5	Consolidation

End

Source : *Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

4.2 Soil Investigation

Three (3) conducted core drilling with Standard Penetration Test (SPT) with a depth of 30 – 40 m and Three (3) Cone Penetration Test (CPT) on the field in 2009. can found the location of the soil investigation points in **Figure 4**. The soil investigation and soil stratigraphy results can be found in **Figure 5** and **Figure 6**, respectively.

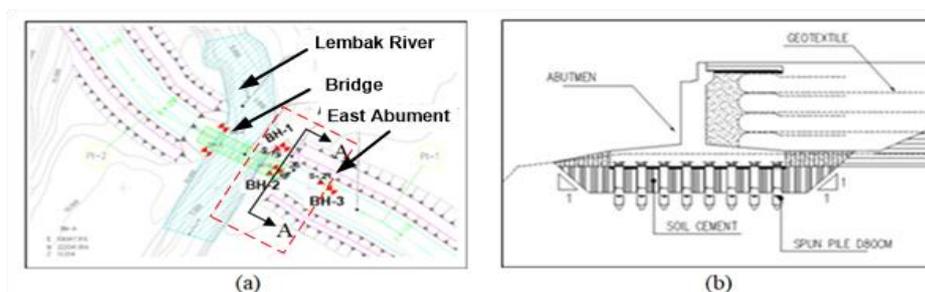

Source : *Final Report of Geotechnical Investigation for AB Link Road and Lembak Bridge*
Bengalon


Figure 4. (a) Soil Investigation Layout; (b) Abutment Cross Section

Based on the data obtained from the soil investigation, the soil is composed as follows:

1. Soil layer from El. +10.00 to +12.00 consists of clay with medium consistency and an average NSPT of 7 blows/30 cm.
2. Soil layer from El. +6.00 to +10.00 consists of soft clay with an average NSPT of 4 blows/30 cm.
3. Soil layer from El. +2.00 to +6.00 consists of sand with medium dense density and an average NSPT of 13 blows/30 cm.


4. Soil layer from El. -2.00 to +2.00 consists of medium clay with an average NSPT of 6 blows/30 cm.
5. Soil layer from El. -2.00 to -4.00 consists of sand with medium dense density and average NSPT of 20 blows/30 cm.
6. Soil layer from El. -4.00 to -12.00 consists of stiff clay with an average NSPT of 9 blows/30 cm
7. Soil layer from El. -12.00 to -20.00 consists of sand with medium dense density and an average NSPT of 20 blows/30 cm.

Figure 5 shows soil layer sand and clay. **Figure 6** shows soil stratigraphy for cross-section AA

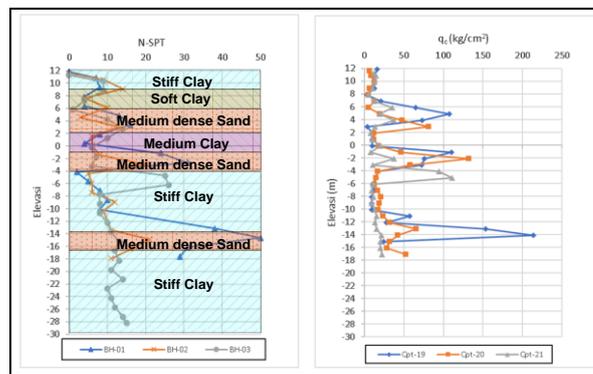

Source : Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

Figure 5. SPT and CPT Graph vs. Elevation

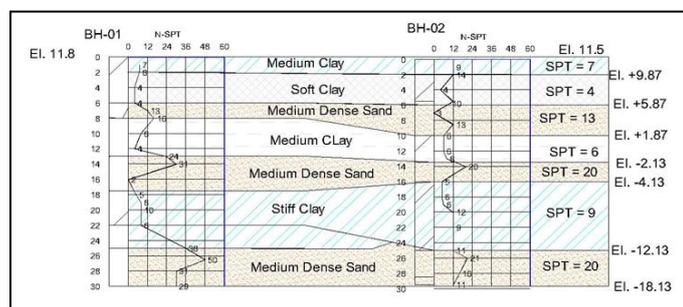

Source : Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

Figure 6. Soil Stratigraphy for Cross Section A-A

4.4 Lab Test Result

Conducted lab testing was on undisturbed soil samples taken during the core drilling. I can found a summary of the lab test in **Table 3**. Based on the water content test (ASTM D2216-98), the water content ranges from 20.3 - 42.2%. From Atterberg limits (ASTM D4318-00), obtained Liquid Limit (LL) value ranging from 46.4 – 89.9 % and Plastic Limit (PL) value ranging from 16.9 – 25.1 %.

Table 3. Lab Testing Summary


Borehole	Depth	Liquid Limit, LL (%)	Plastic Limit, PL (%)	Water Content, Wc (%)	Void Ratio, e	Compressibility Index, Cc
BH-1	2.0 – 2.5	79.4	23.2	29.2	0.80	-
	5.0 – 5.5	49.2	18.2	26.1	0.70	0.26
	19.8 – 20.50	59.1	16.9	32.1	0.80	0.50
BH-2	2.0 - 2.5	79.8	23.2	26.0	0.90	0.34
	5.0 - 5.5	46.4	21.3	20.3	0.60	0.41
	12.3 – 13.00	68.6	25.1	41.5	1.10	0.50
	18.3 – 19.00	59.2	22.4	36.8	1.10	0.64
	21.3 – 22.00	55.3	21.5	27.5	0.70	0.30
	24.3 – 25.00	52.2	22.2	30.4	0.80	0.45
BH-3	2.0 – 2.5	89.9	23.2	29.7	0.80	0.29
	4.8 - 5.5	49.8	23.5	21.5	0.60	0.09
	10.0 – 11.5	75.9	23.1	36.3	0.90	0.52
	19.8 – 20.5	78.3	23.3	42.2	1.10	0.58
	24.3 – 25.0	81.8	24.2	25.0	0.70	-

Source : *Final Report of Geotechnical Investigation for AB Link Road and Lembak Bridge Bengalon*

4.5 Model and Analysis Parameters

Geometric models of embankments and soil stratigraphy used in PLAXIS 3D analysis can be found in **Figure 7**. A medium-density mesh for this model. The node used for element analysis is 10-nodes, which are the basic element from 3D FEM.

Based on the soil investigation, lab test result, and other correlations, the case study parameter is listed in **Table 4**.

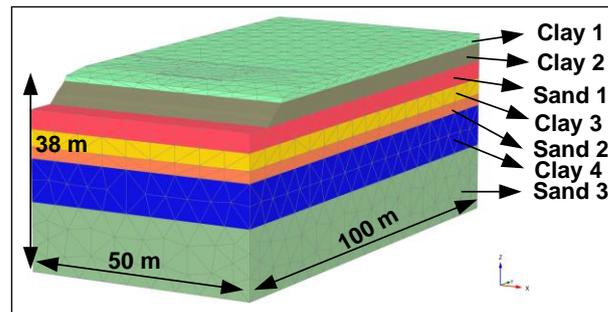

Source : Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

Figure 7. Modeling PLAXIS 3D

Table 4. Soil Parameter

Material	E (kPa)	ν	γ (kN/m ³)	K _{x,kz} (m/day)	K _y (m/day)	c_u (kPa)	ϕ (°)
Clay 1	10000	0.33	16	1.38 E-06	2.76 E-06	28	0
Clay 2	6720	0.33	15	4.54 E-06	9.08 E-06	16	0
Clay 3	5760	0.33	17	8.42 E-05	1.68 E-04	24	0
Clay 4	24000	0.33	15	1.00 E-04	2.01 E-04	36	0
Sand 1	15600	0.3	17	1.37 E-01	2.74 E-01	1	31
Sand 2	24000	0.3	17	2.71 E-01	5.41 E-01	1	35
Sand 3	24000	0.3	17	2.71 E-01	5.41 E-01	1	32
Soil Cement	40000	0.33	15	1.52 E-08	3.00 E-07	240	0
Fill Material	14000	0.33	16	0.0372	0.06	70	0

Source : Final Report of Geotechnical Investigation for AB Link Road and Lembak Bridge Bengalon

Table 5 shows the parameter used for the piles and geotextile used in the PLAXIS 3D analysis. The pile modulus used in the analysis is similar to that is used in the field. On the input of the embedded pile, a base resistance value input to the model, where the value of the base resistance itself obtain from the following formula:

$$Q_p = 40 \times N_{\text{design}} \times A_p \quad (1)$$

Where :

$$N_{\text{design}} = \frac{1}{2} (N_1 + N_2)$$

N_1 = N_{SPT} average to $10 \times D$ (Pile diameter) measured from the bottom tip upward

N_2 = N_{SPT} average to $4 \times D$ (Pile diameter) measured from the bottom tip downward

Table 5. Pile and Geotextile Parameter

Parameter	Unit	Spun Pile	Geotextile
Material type	[-]	Elastic	Elastic
EA	[kN/m]	3.30E+06	50
EI	[kN/m ² /m]	2.10 E+7	-
A	[m ²]	0.157	-
γ	[kN/m ³]	24	-
F_{max}	[kN]	1265	-

Source : *Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

4.3 Analysis Result

This section's focus is divide into two sections: the observation for the ground settlement and the driven pile's movement during the embankment loading. 2 nos. Inclimeters (AB-1 and AB-2) and 2 nos. Settlement plates (SP-9 and SP-10) were installed on the case study location, as presented in **Figure 8**.


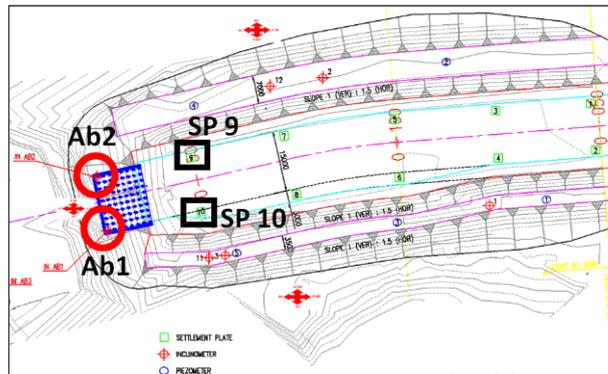


Figure 8. Instrumentation Layout


The ground settlement analysis using the PLAXIS 3D yields results close to the actual settlement plate measurement obtained from the field. The analysis result is plotted to the settlement vs. time curve as shown in **Figure 9**. The field's measurement indicates 490 mm ground settlement, and PLAXIS 3D analysis yields similar results for ground settlement estimation of 490 mm. Used the result of the ground settlement analysis was as a parameter for methods A and B.

Figure 10. Plaxis 3D models for Pile AB-1 and AB-2 were used to compare stack deflections obtained from analysis of Methods A and B with actual trend readings.

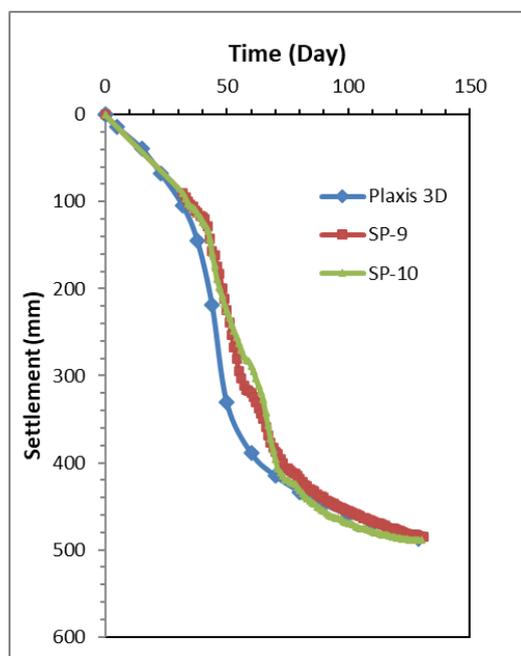

Source : Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge

Figure 9. Plaxis 3D output vs. Field Measurement

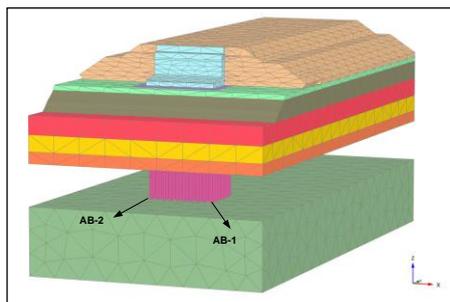


Source : *Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

Figure 10. Pile with inclinometer installed

From PLAXIS 3D analysis, Method A shows a significantly larger deflection with the actual measurement in the field. On the contrary, Method B shows where deflection is closer to the actual measurement obtained from the field.

Figure 11 (a) shows the pile deflection on AB-1 on Method A is 81.7 mm, and Method B is 30.6 mm, while the measured deflection is 19 mm. Method B yields 1.6 times larger deflection than the actual inclinometer reading. At the same time, Method A is 4.2 times larger than the actual measurement.

Figure 11 (b) shows deflection on AB-2, where Method A yields 6.4 times larger deflection than the actual inclinometer reading. At the same time, Method B is 2.4 times larger than the actual measurement. The pile deflection on AB-2 on Method A is 81.9 mm and Method B is 30.9 mm, while the measured deflection is 12.7 mm.

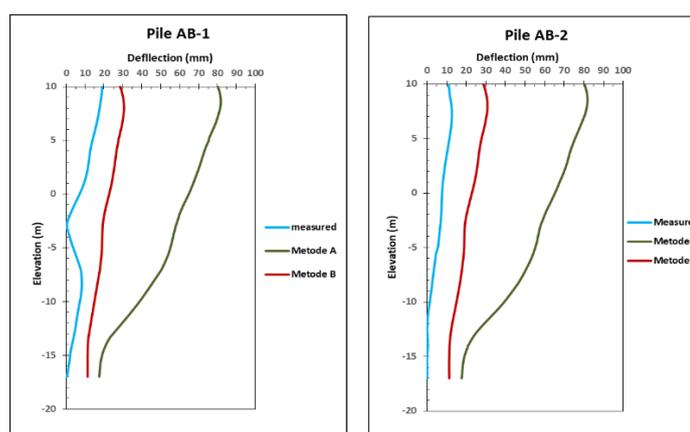

Source : *Thesis on Pile Behavior Toward Abutment Construction using PLAXIS 3D: Case Study on Lembak Bridge*

Figure 11. Data Comparison Chart (a). Pile AB-1 Actual vs. Method A vs. Method B
(b). Pile AB-2 Actual vs. Method A vs. Method B

5. Conclusion and Suggestion

5.1 Conclusion

Based on the research result, several conclusions were made and summarised as follows:

1. Embankment Ground Consolidation Analysis using PLAXIS 3D with the Mohr-Coulomb material model yields similar results with ground settlement measured from 2 nos. Settlement plate (SP-9 and SP-10) of 490 mm in 129 days.
2. Method A analysis, the abutment is constructed beforehand without embankment, produces a much larger pile deflection on Pile AB-1 and AB-2 with a magnitude of 81 mm.
3. Method B analysis, in which constructed preloading embankment was before abutment construction, produces a deflection of 30 mm on Pile AB-1 and AB-2.
4. Comparison between analysis results to the actual inclinometer measurement yields 4-6 times larger deflection on Method A and 1.6 – 2.4 times larger on Method B
5. Construction sequence plays a significant role in the structure built, especially on the river bridge abutment construction, and will affect the pile deflection. The correct sequence will reduce the deflection of the pile foundation.

5.1 Suggestion

The further analysis recommends where materials model with material models other than Mohr-Coulomb. Such as the Soil Hardening Model (HS) and Soft Soil Model, which can produce different results.

References

- [1] Ihsan Al-Abboodi, Tahsin Toma-Sabbagh, and Ali Al-Jazaairry, "Modelling the Response of Single Passive Piles Subjected to Lateral Soil Movement using PLAXIS," *Int. J. Eng. Res.*, vol. V4, no. 03, 2015, doi: 10.17577/ijertv4is030269.
- [2] A. I. Candra, A. Yusuf, and A. R. F, "Studi Analisis Daya Dukung Pondasi Tiang Pada Pembangunan Gedung Lp3M Universitas Kadiri," *J. CIVILA*, vol. 3, no. 2, p. 166, 2018, doi: 10.30736/cvl.v3i2.259.
- [3] A. Mahendra, "Kajian Daya Dukung Pondasi Abutment Jembatan Bawas Kabupaten Kubu Raya," *JeLAST J. Elektron. Laut, Sipil, Tambang*, vol. 1, no. 1, 2014.
- [4] P. Penurunan and K. Jangka, "Usulan Metoda Perhitungan Interaktif Struktur Pondasi di Atas Tanah Lunak dengan Menyertakan Pengaruh Penurunan Konsolidasi Jangka Panjang," *Usulan Metod. Perhitungan Interaktif Strukt. Pondasi di Atas Tanah Lunak dengan Menyertakan Pengaruh Penurunan Konsolidasi Jangka Panjang*, vol. 16, no. 2, pp. 160–170, 2008, doi: 10.14710/mkts.v16i2.3691.
- [5] D. Xiao, G. L. Jiang, D. Liao, Y. F. Hu, and X. F. Liu, "Influence of cement-fly ash-gravel pile-supported approach embankment on abutment piles in soft ground," *J. Rock Mech. Geotech. Eng.*, vol. 10, no. 5, pp. 977–985, 2018, doi: 10.1016/j.jrmge.2018.06.001.
- [6] A. Ekici and N. Huvaj, "Validation of 3D finite element solution for laterally loaded passive piles," *Numer. Methods Geotech. Eng. - Proc. 8th Eur. Conf. Numer. Methods Geotech. Eng. NUMGE 2014*, vol. 1, no. June, pp. 651–656, 2014, doi: 10.1201/b17017-117.
- [7] A. F. Sujatmiko, "SIMULASI RESPON PONDASI TIANG PANCANG AKIBAT PEMBEBANAN LATERAL MENGGUNAKAN METODE BEDA HINGGA," *Media Tek. Sipil*, vol. 9, no. 2, pp. 97–99, 2011.
- [8] A. Jalil, "The Analysis Slope Stability Reservoir Keuliling with Finite Element Methods," *J. Tek. Sipil*, vol. 18, no. 3, p. 239, 2011, doi: 10.5614/jts.2011.18.3.5.
- [9] S. Sumirin and R. B. Arief, "Analisis Efektivitas Model Perkuatan dengan Injeksi Semen untuk Peningkatan Angka Keamanan Lereng," *Media Komun. Tek. Sipil*, vol. 23, no. 1, p. 23, 2017, doi: 10.14710/mkts.v23i1.14738.

- [10] E. Susila and F. Agrensa, "Behaviors of Pipe-Soil Interaction on Unstable Slopes by Finite Element Simulation," *J. Tek. Sipil*, vol. 25, no. 2, p. 87, 2018, doi: 10.5614/jts.2018.25.2.1.
- [11] X. Hu, C. Zhou, C. Xu, D. Liu, S. Wu, and L. Li, "Model tests of the response of landslide-stabilizing piles to piles with different stiffness," *Landslides*, vol. 16, no. 11, pp. 2187–2200, 2019, doi: 10.1007/s10346-019-01233-4.
- [12] N. A.-H. Al-Huda and K. B. S. Suryolelono, "Perilaku Tanah Dasar Fondasi Embankment dengan Perkuatan Geogrid dan Drainase Vertikal," *J. Tek. Sipil*, vol. 21, no. 1, p. 65, 2014, doi: 10.5614/jts.2014.21.1.7.
- [13] H. Nawir, D. Apoji, R. Fatimatuzahro, and M. D. Pamudji, "Prediksi Penurunan Tanah Menggunakan Prosedur Observasi Asaoka Studi Kasus: Timbunan di Bontang, Kalimantan Timur," *J. Tek. Sipil*, vol. 19, no. 2, p. 133, 2012, doi: 10.5614/jts.2012.19.2.5.
- [14] A. Sumarno and A. Nasution, "Analisis Perkuatan Ruang Paro (Half-Space) Oleh Tiang Pancang Pendek Dengan Metode Elemen Hingga," *J. Tek. Sipil*, vol. 25, no. 2, p. 93, 2018, doi: 10.5614/jts.2018.25.2.2.
- [15] I. N. Hamdhan and D. S. Pratiwi, "Analisis Stabilitas pada Lereng Sungai yang Dipengaruhi Pasang Surut," *Media Komun. Tek. Sipil*, vol. 24, no. 1, p. 35, 2018, doi: 10.14710/mkts.v24i1.17169.
- [16] L. Hazzar, M. N. Hussien, and M. Karray, "Influence of vertical loads on lateral response of pile foundations in sands and clays," *J. Rock Mech. Geotech. Eng.*, vol. 9, no. 2, pp. 291–304, 2017, doi: 10.1016/j.jrmge.2016.09.002.
- [17] "PERMODELAN TIMBUNAN PADA TANAH LUNAK DENGAN MENGGUNAKAN PROGRAM PLAXIS Rosmiyati A. Bella *)," pp. 1–9.
- [18] I. N. Hamdhan and F. F. Iskandar, "Analisis Perkuatan Timbunan Di Atas Tanah Lunak Menggunakan Dinding Turap dengan Pendekatan Model Numerik," *Media Komun. Tek. Sipil*, vol. 25, no. 1, p. 48, 2019, doi: 10.14710/mkts.v25i1.18006.
- [19] Plaxis, "Tutorial Manual," *Plaxis 2D Connect Ed. V20*, pp. 6–30, 2004.
- [20] Plaxis, "PLAXIS Material Models," *Plaxis Handb. 2D*, 2015.

- [21] O. Dulić and V. Aladžić, “A note on graphical representations in architecture – diagrams over sketches,” *Contemp. Achiev. Civ. Eng.*, pp. 835–844, 2016, doi: 10.14415/konferencijaGFS.
- [22] J. Arulanantham, “3-D Finite Element Analysis of Laterally Loaded Short Shafts in Soil,” p. 118, 2015.